





Fire Rod Replacement


These are the tools that will be needed to complete the replacement of the fire rod.




1. Be sure to unplug the unit for the power source. Failure to do this step may result in electric shock or damage to other components of the unit.
2. The unit will have to lay on its side or you will have to remove the panel laying on the ground. There are several Phillips head screws that hold the cover on. Both the sides of the cover to. 8 screws total.

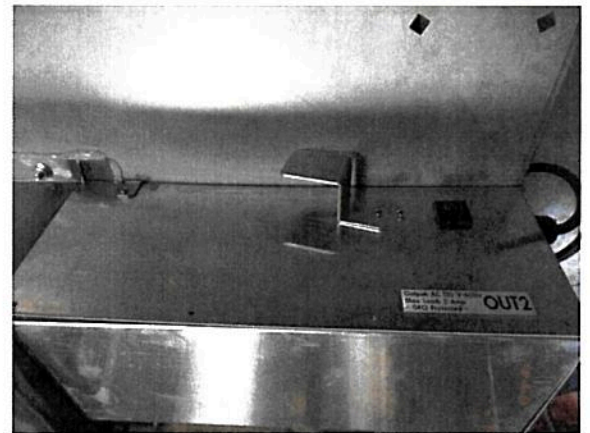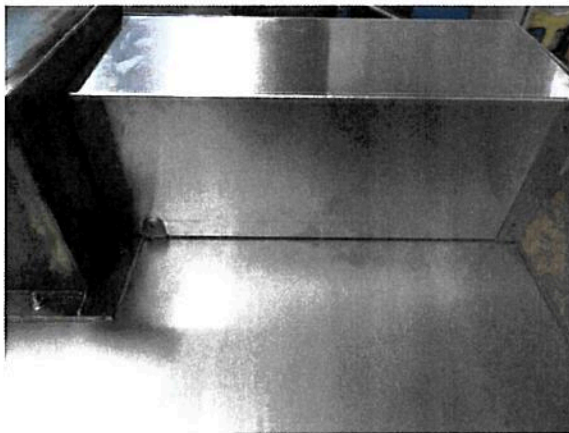

3. Use the wire cutters to cut the old fire rod wires and strip the ends still attached.

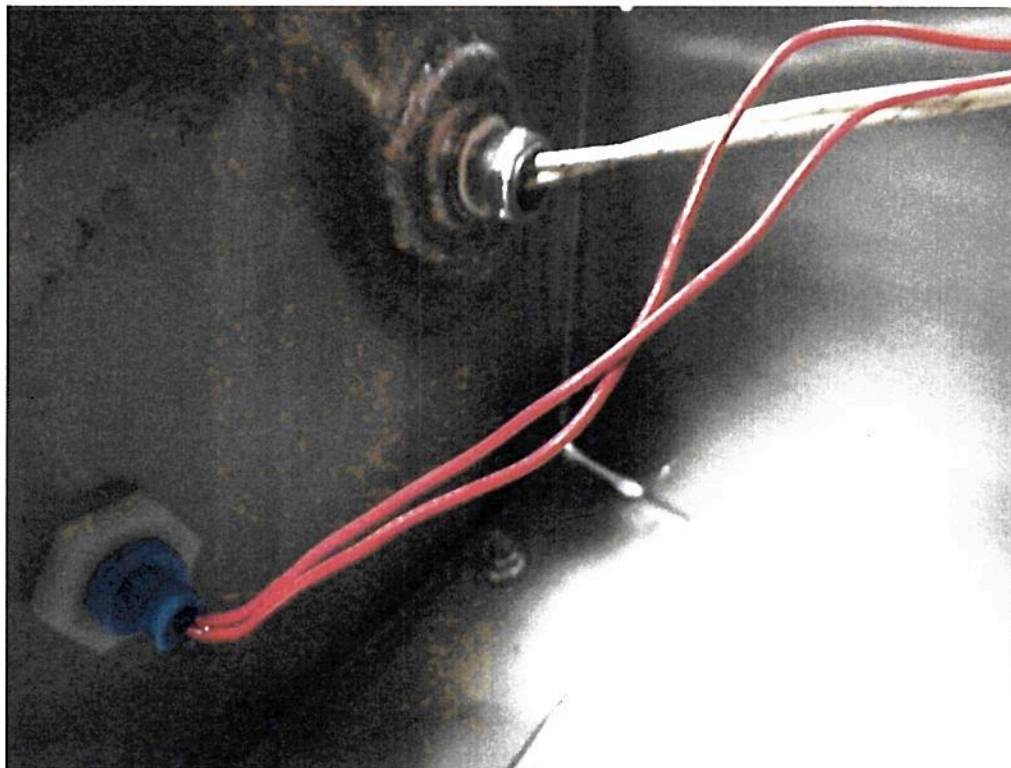

4. Use the box wrench to remove the fire rod from the water tank.

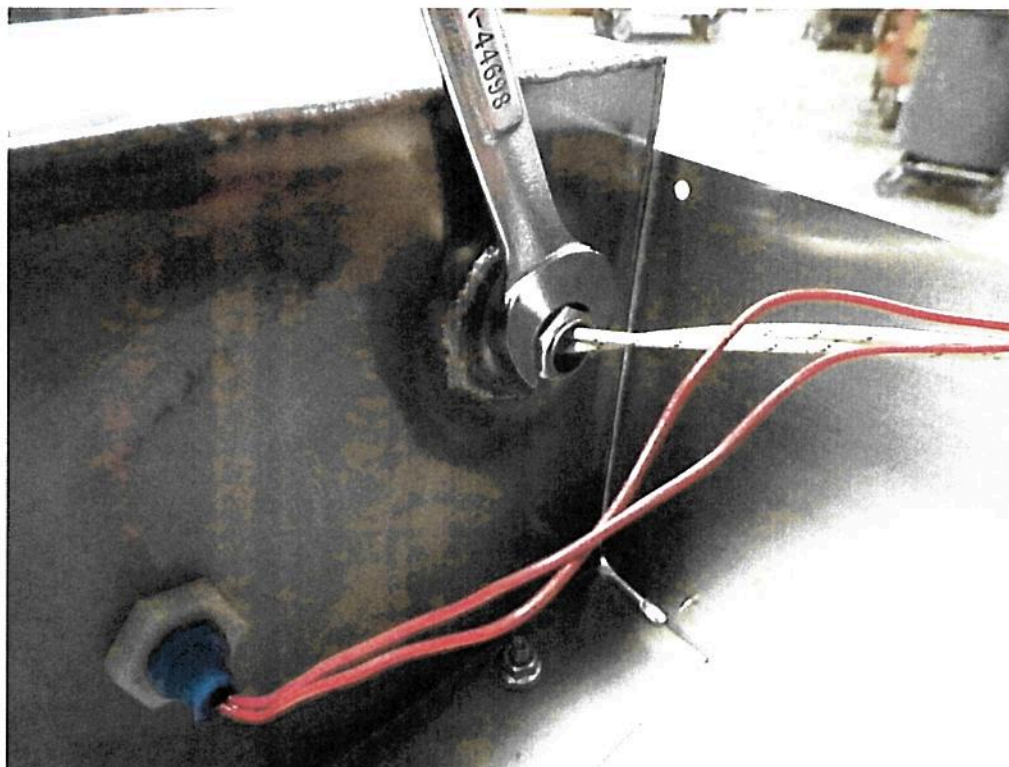

5. Then insert and tighten down new fire rod. Using the supplied wire nuts to wire nut together the ends of the exposed wires. It does not matter which wire goes where.



6. Reinstall the cover upon completion.
7. If all of the following steps have been followed. Also that the cover is back in place. The unit can now continue to be used as regular

There is also a relay cube sent in this kit. It simply plugs in. It can only plug in one way. Please make sure this is plugged in, otherwise the unit will not power up.

